




Duracell® Battery Specifications

Effective January 2, 2024
Supersedes all previous information
Subject to change without notice

GROUP NO.	PART NO.	ITEM NUMBER	PERFORMANCE LEVEL				WEIGHT (lbs)	MAXIMUM OVERALL DIMENSIONS						WARRANTY FREE MONTHS	FOOTNOTES	
			CCA	R.C.	REF. CA	20 HR CAP.		LENGTH		WIDTH		HEIGHT				
								in	mm	in	mm	in	mm			
12-VOLT DURACELL® AGM AUTOMOTIVE / MARINE																
34/78	78DTAGM	347743	750	120	860	55	43	10-3/4	273	6-7/8	175	8	203	36	2,17,38,39,P	
27M	27MAGM	980025493	580	175	900	92	61.5	12-3/4	324	6-3/4	171	9-3/8	238	18	2,17,38,39,U	
31M	31DTMAGM	347736	800	200	1000	105	67.5	12-15/16	329	6-3/4	171	9-3/8	238	18	2,16,17,38,39,A	
34M	SL34MAGM	347674	750	120	860	55	42.5	10-3/4	273	6-7/8	175	8-3/8	212	18	2,17,38,39,U	
24F	24FAGM	980054342	710	110	825	65	44.5	11-1/8	282	6-5/8	168	9	229	36	2,17,38,39	
34	24/34AGM	135984	750	120	860	55	42.5	10-3/4	273	6-7/8	175	8	203	36	2,17,28,38,39	
34R	24F/34RAGM	136022	750	120	860	55	42.5	10-3/4	273	6-7/8	175	8	203	36	2,17,28,38,39	
35/85	35/85AGM	136008	640	100	755	50	40	9-9/16	242	6-3/4	171	7-3/4	197	36	2,17,18,37,38,39	
47 (H5)	47(H5)AGM	136036	600	100	690	60	39	9-9/16	242	6-7/8	175	7-1/2	190	36	17,22,38,39	
48 (H6)	48(H6)AGM	136048	760	120	875	70	47.5	11	278	6-7/8	175	7-1/2	190	36	17,22	
49 (H8)	49(H8)AGM	136063	850	170	975	92	58	13-15/16	354	6-7/8	175	7-1/2	190	36	17,22,38,39	
65	65AGM	034516	750	150	860	75	47.5	12	305	7-3/8	187	7-5/8	194	36	2,17,38,39	
78	78AGM	136001	750	120	860	55	43	10-3/4	273	6-7/8	175	7-1/4	184	36	2,17,38,39,E	
94R (H7)	94R(H7)AGM	136056	800	140	920	80	52	12-7/16	315	6-7/8	175	7-1/2	190	36	17,22,38,39	
12-VOLT DURACELL® AUTOMOTIVE																
34/78	78DT	849723	800	115	985	40.5	10-3/4	273	6-7/8	175	8	203	36	14,17,18,22,28,P		
24F	24F	347655	725	120	890	42.5	10-3/4	273	6-3/4	171	9	229	36	17,22		
25	25	347573	625	95	770	37	9-3/4	248	6-7/8	175	8-7/8	225	36	17,22		
26R	26R	347582	540	80	665	29	8-3/4	222	6-3/4	171	8	203	36	17,18,22,37		
27	27	347566	840	140	1035	50.5	12-5/8	321	6-3/4	171	9	229	36	17,21		
27F	27F	980025494	840	140	1035	50.5	12-5/8	321	6-3/4	171	9	229	36	17,21		
34	34	347943	800	115	985	40	10-3/4	273	6-7/8	175	8	203	36	17,18,22,28		
35	35	347964	640	95	785	37	9-9/16	247	6-7/8	175	8-7/8	225	36	17,22		
36R	36R	348078	650	120	800	38	10-1/4	260	7-1/4	184	8	203	36	—		
40R (T6)	40R(T6)	348015	650	105	800	37	11	278	6-7/8	175	6-7/8	175	36	17,22		
47 (H5)	47(H5)	980054341	650	100	800	35.5	9-9/16	242	6-7/8	175	7-1/2	190	36	17,22		
48 (H6)	48(H6)	348116	730	120	900	41.5	11	278	6-7/8	175	7-1/2	190	36	17,22		
49 (H8)	49(H8)	348085	900	185	1105	52.5	13-15/16	354	6-7/8	175	7-1/2	190	36	17,22		
51	51	347912	450	70	555	28	9-3/8	238	5	127	8-3/4	222	36	22		
51R	51R	347950	500	75	615	28.5	9-3/8	238	5	127	8-3/4	222	36	22		
58	58	348123	580	85	715	32	10	254	7-1/4	184	6-7/8	178	36	17,22		
58R	58R	347980	580	85	715	32	10	254	7-1/4	184	6-7/8	175	36	17,22		
59	59	348092	590	100	725	38.5	9-1/2	241	7-7/16	189	7-1/2	190	36	17		
65	65	348108	850	150	1045	46.5	12	305	7-3/8	187	7-5/8	194	36	17,22		
75	75	348138	690	95	850	35	9-3/4	248	7	178	7-1/4	184	36	17,22,E		
78	78	348061	800	115	985	40	10-3/4	273	6-7/8	175	7-1/4	184	36	17,22,E		
86	86	348145	690	95	850	35	9	229	6-7/8	175	8-1/8	206	36	22		
90 (T5)	90(T5)	348052	600	90	740	33.5	9-9/16	242	6-7/8	175	6-7/8	175	36	17,22		
94R (H7)	94R(H7)	347781	790	140	970	45.5	12-7/16	315	6-7/8	175	7-1/2	190	36	17,22		
96R	96R	347766	600	90	740	32.5	9-9/16	242	6-7/8	175	6-7/8	175	36	17,22		
121R	121R	599897	550	80	675	30.5	8-1/4	210	6-15/16	177	8-1/8	206	36	22		
124R	124R	348031	700	100	860	37.5	10-1/4	260	6-7/8	175	8-3/8	212	36	22		
12-VOLT DURACELL® LAWN & GARDEN																
U1	EU1L	347685	300	—	370	17	7-3/4	197	5-1/8	130	7-1/4	184	6	22,Z		
U1R	EU1R	349388	300	—	370	17	7-3/4	197	5-1/8	130	7-1/4	184	6	22,Y		
6 & 12 VOLT DURACELL® COMMERCIAL																
1	1	347752	640	130	785	33	9	229	6-7/8	175	8-3/4	222	12	21,25		
4D	4D	347722	1050	290	1290	97	20-1/2	520	8-5/8	219	9-7/8	251	12	12,17,21,22		
4DLT	4DLT	347994	850	240	1045	78.5	20	508	8-1/8	206	8-1/8	206	12	12,19,25		
8D	8D	348038	1425	440	1755	127	20-3/4	527	11	279	10	254	12	12,17,21,22		
31	31A	766391	950	175	1170	55.5	13	330	6-3/4	171	9-1/2	241	12	17,19,21,22		
31	31C	347759	950	175	1170	55.5	13	330	6-3/4	171	9-1/2	241	12	17,19,21,22,X		
12-VOLT DURACELL® MARINE																
24	24DC	347618	575	705	130	65	44	10-3/4	273	6-3/4	171	9-3/8	238	12	12,17,U	
24	24DCX	347640	525	645	135	75	45.5	10-3/4	273	6-3/4	171	9-3/8	238	12	12,17,35,U	
24	24MSHO	849716	800	1000	130	—	44	10-3/4	273	6-3/4	171	9-3/8	238	12	17,22,U	
24	24MS	347693	550	675	90	—	37	10-3/4	273	6-3/4	171	9-3/8	238	12	17,22,U	
27	27DCX	347729	675	830	175	80	51	12-1/2	318	6-3/4	171	9-3/8	238	12	12,17,U	
31	31DCX	347589	725	890	190	100	58.5	13	330	6-3/4	171	9-1/2	241	12	17,21,22,A	
6 & 8 VOLT DURACELL® GOLF CAR																
GC2	GC2	347700	215	157	105	—	395	60.5	10-1/4	260	7-1/8	181	10-7/8	276	12	11,36,U
GC2	EGC2	347631	230	174	120	—	448	64	10-1/4	260	7-1/8	181	10-7/8	276	12	4,11,36,U
GC8	GC8	347597	165	130	85	121	318	68	10-1/4	260	7-1/8	181	11-1/8	283	12	4,11,36,U
6-VOLT DURACELL® AGM VALVE REGULATED																
GC2	GC2AGM	401742	680	900	380	409	190	68	10-1/4	260	7-1/8	181	10-7/8	276	12	2,U
12-VOLT DURACELL® AGM POWER SPORTS																
—	ET4L	980101219	40	3	—	3.2	4-7/16	113	2-3/4	70	3-7/16	87	6	38,39,ZZ		
—	ET5L	980101220	50	4	—	4.2	4-7/16	113	2-3/4	70	4-1/8	105	6	38,39,ZZ		
—	ETX9	980066071	120	8	—	7.5	5-7/8	150	3-7/16	88	4-3/16	106	6	38,39,M		
—	ETX12	980066058	180	10	—	10	5-7/8	150	3-7/16	88	5-1/8	130	6	38,39,M		
—	ETX14	980066059	220	12	—	11.5	5-7/8	150	3-7/16	88	5-3/4	145	6	38,39,42,75,M		
—	ETX15	980066060	220	13	—	11.5	5-1/4	134	3-1/2	90	6-9/16	166	6	38,39,42,76,M		
—	ETX16L	980066062	325	19	—	17	6-7/8	175	4	100	6-1/8	155	6	38,39,42,74,M		
—	ETX20L	980066063	310	17.5	—	15	7	178	3-1/2	90	6-1/8	155	6	38,39,M		
—	ETX30LA	980066070	400	26	—	21.5	6-5/8	168	5-3/16	131	6-15/16	176	6	38,39,42,78,M		

- Batteries are maintenance-free calcium grids, except where noted
- Batteries manufactured in black cases & covers, except where noted
- SAE or DIN auto posts used, unless noted
- Warranty is suggested months
- Weights are approximates
- CA and MCA are reference ratings, for comparison only
- Other than CCA and RC, ratings are "nominal"
- CCA and RC ratings conform to B.C.I. specifications

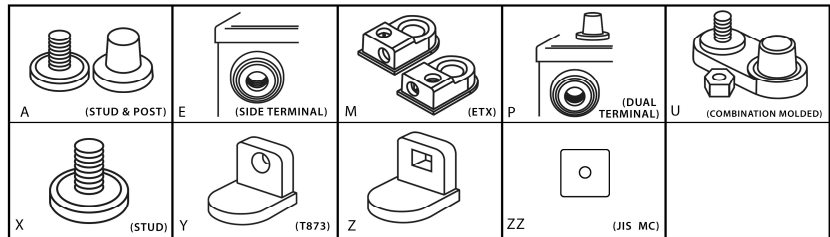

Footnotes

- 2 Black cover / Gray case
- 4 Gray cover / Gray case
- 11 Low maintenance - low antimony grids
- 12 Hybrid construction
- 14 Centerline terminal posts
- 16 Dual terminal, universal design
- 17 Includes handle
- 18 Includes height adapter, if needed
- 19 Includes lifting ledges
- 21 Anchor locked elements
- 22 Flush manifold vented cover
- 25 With individual vent caps
- 28 For height with adapter add 5/8" (16mm)
- 35 Deduct 15% from CCA and CA rating to allow for double insulation (glass mat)
- 36 Peak Performance Capacity
- 37 For height with adapter add 7/8" (22mm)
- 38 "Non-spillable" defined by DOT (Department of Transportation) definitions
- 39 "Non-spillable" defined by ICAO (International Civil Aviation Organization) and IATA (International Airline Transport Association) definitions
- 42 Height without adapter
- 74 Shipped with 20mm height adapter
- 75 Shipped with two (2) 17mm height adapters
- 76 Shipped with 10mm height adapter
- 78 Shipped with 22mm height adapter

Terminal Footnotes

- A Flush combination terminal w/ 5/16" stud and SAE Post, hex nuts included
- E Automotive Side Terminal
- M Molded-in top and side connection terminal (ETX)
- P Dual terminal, automotive top and side
- U Molded-in offset SAE post and vertical 5/16" POS. and NEG. stainless steel studs with hex nuts
- X 3/8" x 16 stainless steel stud terminals
- Y Small L terminal with round hole
- Z Small L terminal with square hole
- ZZ JIS Power Sports

PROPOSITION 65 WARNING: Battery posts, terminals and related accessories contain lead and lead compounds, chemicals known to the State of California to cause cancer and reproductive harm. Batteries also contain other chemicals known to the State of California to cause cancer.
WASH HANDS AFTER HANDLING.